

The MB1.06.0G505032 is a 100W high gain Solid State Broadband High Power Amplifier. This amplifier module utilizes the latest high power RF GaN transistors and also features built in control and monitoring, with protection functions to ensure high availability. This amplifier is suitable for broadband jamming and EMC testing. The amplifier comes with an industry leading warranty.

## Features

1GHz-6GHz frequency range	Solid-state Class AB Broadband design
Psat 50dBm type	Instantaneous ultra-broadband
Power gain 50 dB	Suitable for CW, and Pulse
50 ohm input/output impedance	Small and lightweight
Built-in control, monitoring and protection circuits	High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS(T=25°C,DC Voltage= 32V, Load VSWR ≤ 1.2)

Description	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	1		6	GHz
Output Power CW* @ Pin=0dBm	Psat	90	100		W
Power Gain @ Pin= 0dBm	Gp	49	50		dB
Power Gain Flatness@ Pin=0dBm	ΔGp		± 2	± 2.5	dB
Input Power for Rated PSAT	P <sub>IN</sub>	-2	0	2	dBm
Harmonics @ Pin=-5dBm	2 <sup>nd</sup> /3 <sup>rd</sup>		-20/-25	-10/-12	dBc
Spurious Signals@ Pin=0dBm	Spur			-60	dBc
Input Return Loss	S11			-12	dB
Third Order Intercept Point					
2-Tone @ 40dBm/Tone, 100kHz Spacing	IP3		N/A		dBc
Operating Voltage	VDC	28	32	33	V
Quiescent Current @Enable=+3.3V	IDQ		7		A
Current Consumption @Pout= 70~100 W	IDD		12	15	A
Switching Time @ 1kHz TTL, P <sub>IN</sub> =0dBm	TON/TOFF		2	4	μs

**Note\*:** Fundamental Power, Harmonics are excluded

**Note\*\*:** 100MHz Data is Available, please contact sales for further information.

## MECHANICAL SPECIFICATIONS

Cooling External: Heat Sink Needed  
 Length\* Width\*Height: 240\*240\*25 mm  
 Weight: 6.6 lbs  
 RF Connector Input: SMA, Female  
 RF Connector Output: Type N, Female

## ENVIRONMENTAL SPECIFICATIONS (Design to Meet)

Module Operation Temperature* <sup>1</sup>	-20	65* <sup>2</sup>	°C
Storage Temperature Range	-45	85	°C
Relative-Humidity		95	%
Altitude * <sup>3</sup>	N/A		
Vibration/Shock * <sup>3</sup>	N/A		

**Notes** \*1: Module Operation Temperature can be extended to -45~85°C, Contact Sales for update.

**Notes** \*2: Should Supply Adequate Heat Dissipation, Enough Fan and Heat-Sink is necessary during the Temp Test.

**Notes** \*3: Altitude /Vibration are designed with considerations, but without tests and experiments.

## LIMITS

Input RF drive level without damage	$P_{in} \leq 10$	dBm
Load VSWR @ POUT =50W	$VSWR \leq 5:1$ [Design To Meet]	N/A
Load VSWR @ POUT =70W	$VSWR \leq 3:1$ [Design To Meet]	N/A
Thermal Degradation	90°C @ heat-sink [recovery@<60°C]	°C

## DC INTERFACE CONNECTOR – [Hybrid D-Sub 7-Pin, Male]


Pin #	Description	Specifications
A1	GND	Ground
A2	VDD	32VDC
1	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
2	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C
3	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
4	GND	Ground
5	N/C	No Connection

## PLOTTED AND OTHER DATA


Notes:

1. Values at +25°C, sea level.
2. ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
3. Heat Sink required for Proper Operation, Unit is cooled by conduction to heat sink.


**TYPICAL PERFORMANCE DATA [Load VSWR ≤ 1.2], (Normal temp. +25±3°C, Heat-Sink with Fan Cooling)**

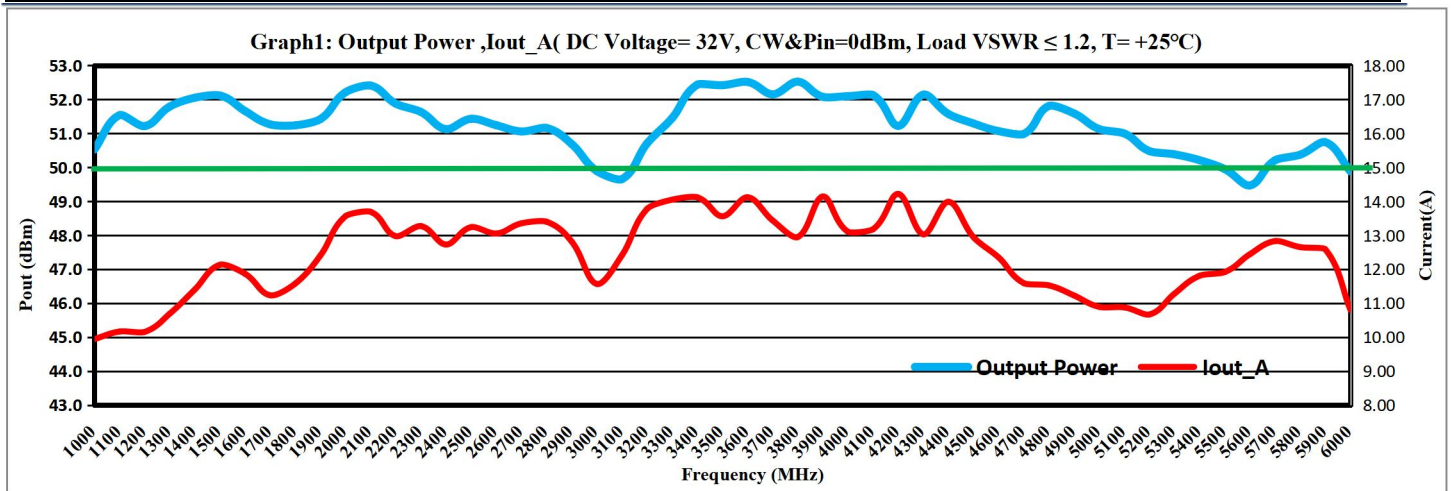

**Graph1: Power Gain (DC Voltage= 32V, Pin=0dBm, Load VSWR ≤ 1.2, T= +25°C)**

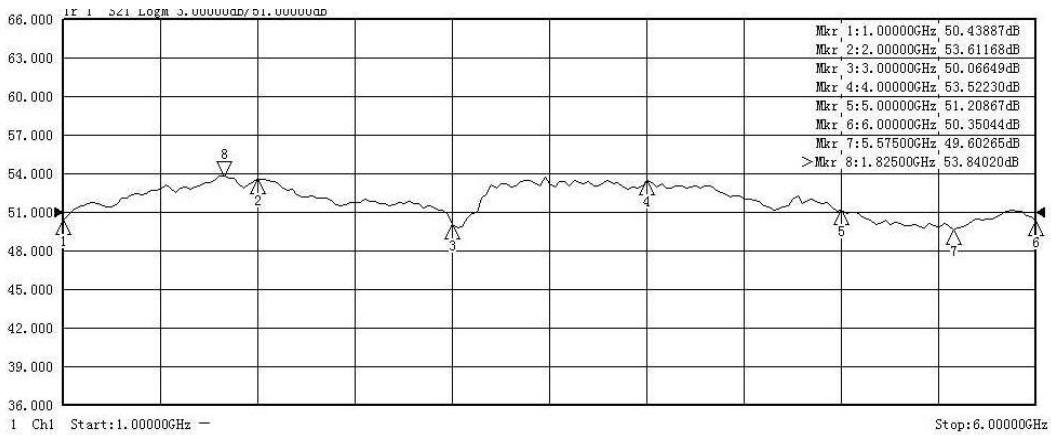

**Graph 2: Input Return Loss (DC Voltage= 32V, Pin=-30dBm, Load VSWR ≤ 1.2, T= +25°C)**

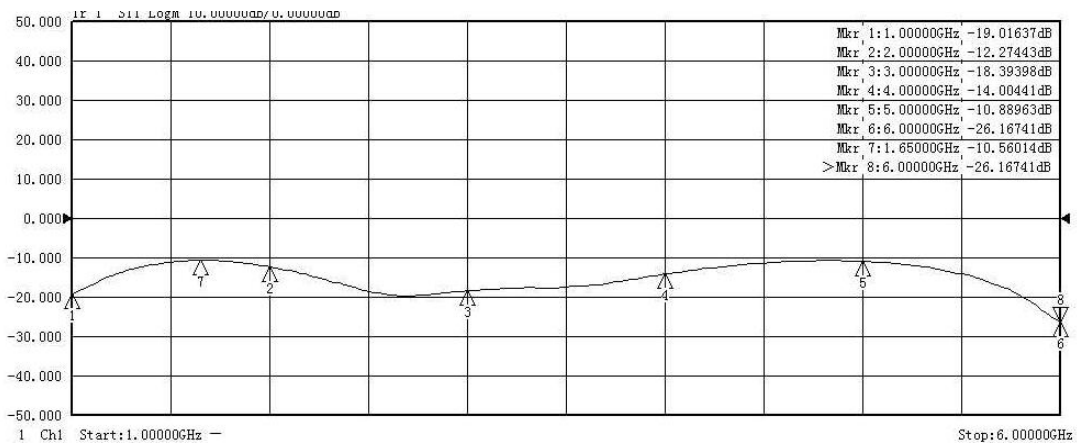

**OUTLINE DRAWING [mm] & Product View**

