


General Description:

This system is a broadband power amplifier designed for CW/Digital/Pulse signals and general-purpose amplification. Using advanced high power density LDMOS and GaN semiconductor devices, these high-performance amplifiers achieve high efficiency, high gain, and wide dynamic range. Like all Elite RF amplifiers, the product comes with an industry leading warranty.

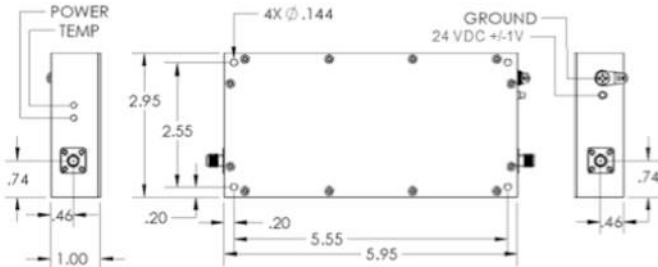

Features

20 - 1000 MHz
10 watts
42 dB gain
Class AB
28 VDC

Indicator options

DC Power
Temp Fault

Protections

Thermal Overload
Over Voltage
Reverse Polarity

ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	20		1000	MHz
Output Power CW	Psat		10		Watt
Output Power at 1 dB Compression	P1dB		-		Watt
Small Signal Gain	Gp		42		dB
Gain Flatness @ Psat	Delta Gp 1		+/- 2		dB
Input VSWR	S11		2:1		-
IMD @ 500 MHz @ 30 dBm/ tone	IP3		42		dBm
Harmonics at 5 Watts	H		-20		dBc
Spurious Signals	Spur		-60		dBc
Operating Voltage	VDC	27	28	29	VDC
Current at 10 watts	Current		1.2		Amps
Class of Operation	C		AB		Class
Noise Figure	NF		5		dB
Large Signal Gain @ 10 watts	Lsg		40		dB

ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	Tc	-20		+60	Deg C
Storage Temperature	Tstg	-40		+85	Deg C
Relative Humidity (non-condensing)	RH			95	%
Altitude	ALT			10,000	Feet
Vibration/Shock	VI /SH			Normal Truck Transport	

MECHANICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Dimensions	Dim		6.0 x 3.0 x 1.05		Inches
Weight	Wt.		1		lbs.
Connectors	RF Conn		SMA/SMA		-
Cooling	Th		Heatsink required		-

Elite RF LLC

1700 Tower Dr, Hanover Park, IL 60133, USA

Call us for customer service/technical support at: 847-592-6350

Email: sales@eliterf.com Web: www.eliterfllc.com