

1-6GHz 30W CW Power Amplifier

➤ Features

- Class A solid state design
- Power level/Output VSWR display
- Protected against over heat/ over current/over VSWR

➤ Applications

- Communication
- EMC



➤ Electrical Specifications

Parameter	Specification	Notes
Frequency	1-6GHz	
Pout	30W Min.	
P1dB	20W Min.	
Gain	45dB Min.	
Gain Flatness	±4dB	
Input VSWR	2:1 Max	50 Ω
Output VSWR	2:1 Max	
Harmonics	-15dBc Typ.	
Spurious	-60dBc Max.	
Power Supply	100-240V	
Power Consumption	300WMax.	At 30W output
Input Power	5dBm Max.	
Power Display Accuracy	±0.5dB	


➤ Environmental Characteristics

Parameter	Specification	Notes
Operation Temperature	0 - +40 °C	
Storage Temperature	-20 - +75 °C	
Relative Humidity	5 - 95%	

➤ Other Specifications

Parameter	Specification	Notes
Dimensions	2U	
In/Out Connector	N-F/N-F	
Weight	20kg Max	
Cooling	Fan Cooling	
Control interface	LAN/USB	

➤ **User Interface**

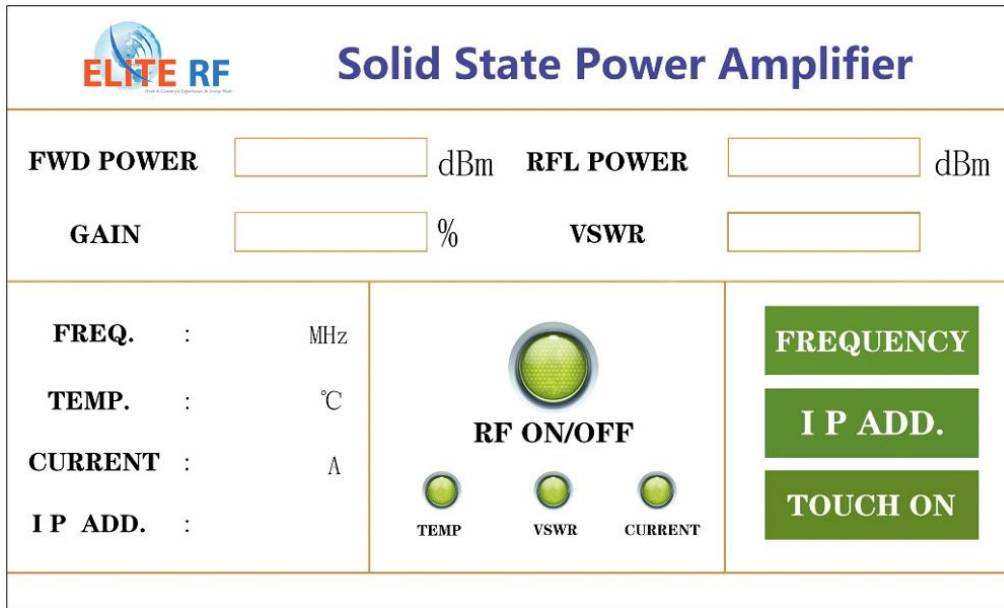

➤ **Outline Drawing**

Just for Reference

