

The AB018026G4040AC is a 10W high gain Solid State Broadband High Power Amplifier. This amplifier module utilizes the latest high power RF GaN transistors and also features built in control and monitoring, with protection functions to ensure high availability. This amplifier is suitable for broadband jamming and EMC testing. The amplifier comes with an industry leading warranty.

Features

| | |
|--|---------------------------------------|
| 18GHz-26.5GHz frequency range | Solid-state Class AB Broadband design |
| Psat 40dBm type, 39 dBm min | Ultra-broadband |
| Power gain 44dB Type. | Lightweight and portable |
| Built-in control, monitoring and protection circuits | High reliability and efficiency |

ELECTRICAL SPECIFICATIONS(T=25°C ,DC Voltage= 24V,Load VSWR ≤ 1.2)

| Description | Symbol | Min | Typ | Max | Unit |
|---------------------------------------|-------------------|-----|------|------|------|
| Operating Frequency | BW | 18 | | 26.5 | GHz |
| Output Power CW@ Pin=-4 dBm | Psat | 39 | 40 | | dBm |
| Power Gain @ Pin=-4dBm | Gp | | 44 | | dB |
| Power Gain Flatness @ Rated Pin=-4dBm | ΔGp | | ±0.5 | | dB |
| Small signal Gain @ Pin=-30dBm | G _{SS} | | 55 | | dB |
| Small signal Flatness@1GHz | ΔG _{SS} | | ±1.5 | | dB |
| Small signal Flatness@K-band | ΔG _{SS} | | ±2.5 | | dB |
| Input Power for Rated Psat | P _{IN} | | -4 | 0 | dBm |
| Harmonics @ Pin=-4dBm | 2 nd | | | -20 | dBc |
| Spurious Signals@ Pin=-4dBm | Spur | | | -55 | dBc |
| Operating noise* | NF | | N/A | | dB |
| Input VSWR | VSWR _i | | | 2 | N/A |
| Input VSWR | VSWR _o | | | 2 | N/A |
| Operating Voltage | VAC | 100 | 120 | 240 | V |
| Current Consumption @ Pout= 8-10W | IDD | | 2.2 | | A |

Note*: contact sales@eliterf.com for further information.

Note:** Switching Time for TTL can be customized for less than 500nS, please contact our sales.

PROTECTION AND WARNING FUNCTION

- Over-current protection
- Over-temperature protection
- Over-voltage protection

MECHANICAL SPECIFICATIONS

Inbuilt Heatsink for cooling
 Length* Width*Height: 19 X 15 X 3.5 inches
 Weight: 30 lbs
 RF Connector Input: 2.92,Female
 RF Connector Output:

ENVIRONMENTAL SPECIFICATIONS (Design to Meet)


| | | | |
|--|-------------------|-----|----|
| Module Operation Temperature* ¹ | -20* ¹ | +55 | °C |
| Storage Temperature Range | -50 | +70 | °C |
| Relative-Humidity | | 95 | % |
| Altitude* ² | N/A | | |
| Vibration/Shock* ² | N/A | | |

Notes •1: Module Operation Temperature can be extended to -40 N+G0 C, Contact Sales for update.
 •2: Altitude /Vibration are designed with considerations, but without tests and experiments.

LIMITS

| | |
|-------------------------------------|----------------------------------|
| Input RF drive level without damage | $P_{in} \leq 0$ dBm |
| Load VSWR @ POUT = 10W | VSWR $\leq 5:1$ [Design To Meet] |
| Thermal Degradation | 85°C@ heatsink |

PLOTTED AND OTHER DATA

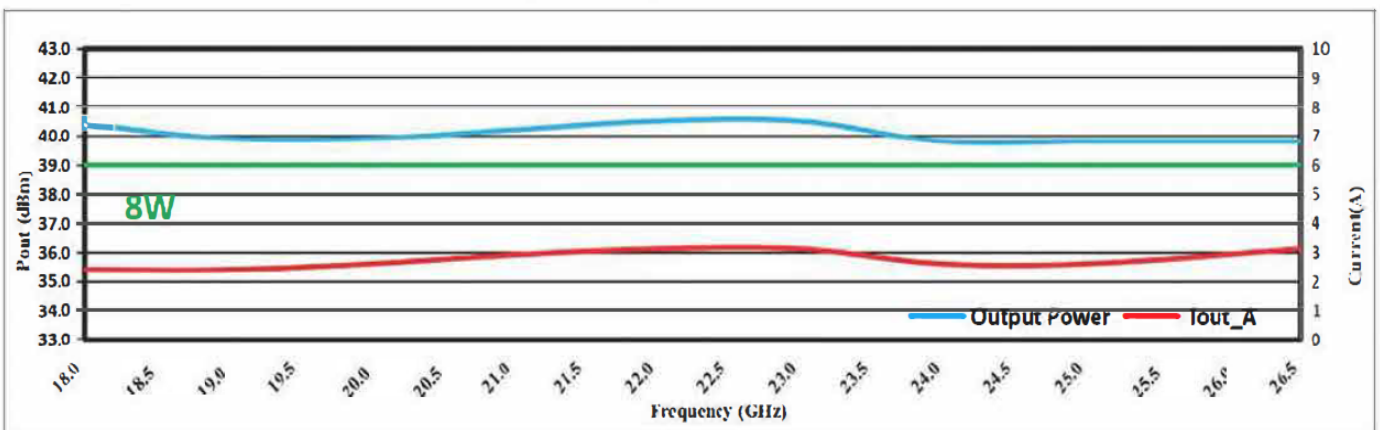

Output power & Iout (Pin=-4 dBm)