

0.5-2GHz 100W CW Power Amplifier

➤ **Features**

- Class A solid state design
- Power level/Output VSWR display
- Protected against over heat/ over voltage/over VSWR



➤ **Applications**

- High Power Test
- EMC

➤ **Electrical Specifications**

Parameter	Specification	Notes
Frequency	0.5-2GHz	
Output Power	100W Min.	
P1dB	50W Typ.	
Gain	50dB	
Gain Flatness	±3dB	
Input VSWR	2:1 Max	50 Ω
Harmonics	-20dBc Typ.	
Spurious	-60dBc Max.	
Power Supply	100-240V	
Power Consumption	1000WMax.	
Input Power	5dBm Max.	
Power Display Accuracy	±0.5dB	


➤ **Environmental Characteristics**

Parameter	Specification	Notes
Operation Temperature	0 - +40 °C	
Storage Temperature	-20 - +75 °C	
Relative Humidity	5 - 95%	

➤ **Other Specifications**

Parameter	Specification	Notes
Dimensions	2U	
In/Out Connector	N-F/N-F	
Weight	20kg Max	
Cooling	Fan Cooling	
Control interface	LAN/USB	

➤ **Home Screen**

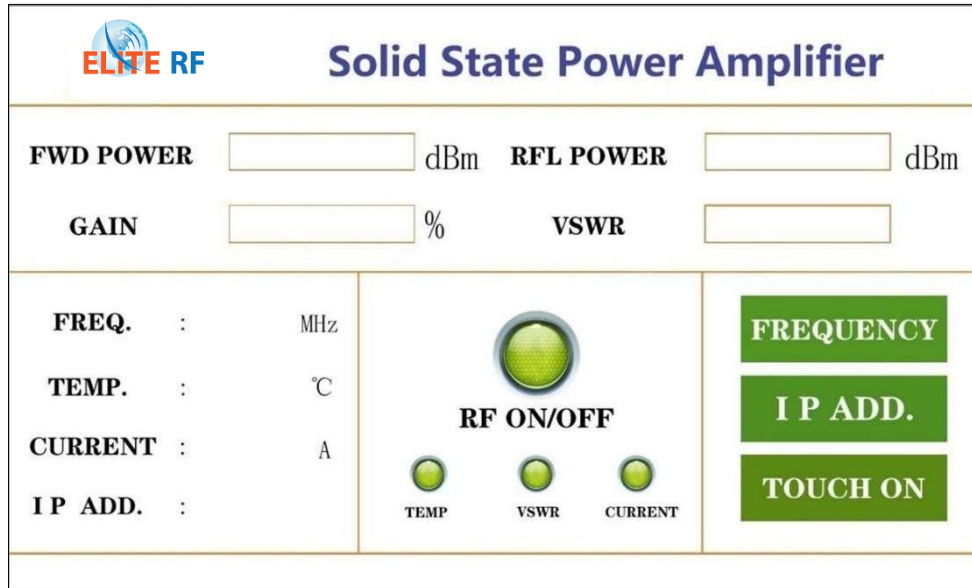

➤ **Outline Drawing**

Just for Reference

