

# LINEAR WIDEBAND POWER AMPLIFIER

**Model – AB.026.0G4340AC**



## General Description:

Elite RF's **MB Series** amplifier is a wideband power amplifier designed for CW signals fabricated on GaN on SiC process and can operate up to **6.0 GHz**. These amplifiers offer high power density, decade bandwidth performance, low thermal resistance, and wideband performance. They can be widely used for military and commercial applications.

Like all Elite RF amplifiers, this product comes with an industry leading **3-year warranty**.

### Features

Wide Freq. Range  
High Output Power  
High Gain  
High Reverse Isolation  
Built-in Protection

### Protections

Thermal Overload  
Over Voltage

## ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min	Typ	Max	Unit
Frequency Range	BW	20		6000	MHz
Output Power CW	Psat		20		Watt
Output Power at 1 dB Compression	P1dB		10		Watt
Small Signal Gain	Gp		42		dB
Gain Flatness	Delta Gp 1		+/- 3		dB
Input VSWR	S11		2:1		Ratio
IMD @ 2 GHz @ .1 watt/tone / 1 MHz spacing	IP3		48		dBm
Harmonics	H		-20		dBc
Spurious Signals	Spur		-60		dBc
Operating Voltage	Opv	100	120	240	VAC
AC Power at 20 watts	Pd		200		Watt
Class of Operation	C		AB		Class
Noise Figure	NF		7		dB
Large Signal Gain	Lsg		40		dB
Max Load VSWR @ 20 Watts	ML		6:1		Ratio

## ENVIRONMENTAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Operating Case Temperature	Tc	0		+50	Deg. C
Storage Temperature	Tstg	-40		+85	Deg. C
Relative Humidity (non-condensing)	RH			95	%
Altitude	ALT			10,000	Feet
Vibration/Shock	VI /SH		Normal Truck Transport		


## MECHANICAL CHARACTERISTICS

Parameter	Symbol	Min	Typ	Max	Unit
Dimensions	Dim		19 x 15 x 5.25		Inches
Weight	Wt.		25		lbs.
Connectors In/Out	RF Conn		N-Type		-
Cooling	Th		Forced air cooling		-


## OPTIONS

Parameter	Add suffix to part number
Heat sink and fans	N/A
Isolator with forward and reverse voltage outputs	N/A
TTL Input Trigger	N/A

## Mechanical Drawings

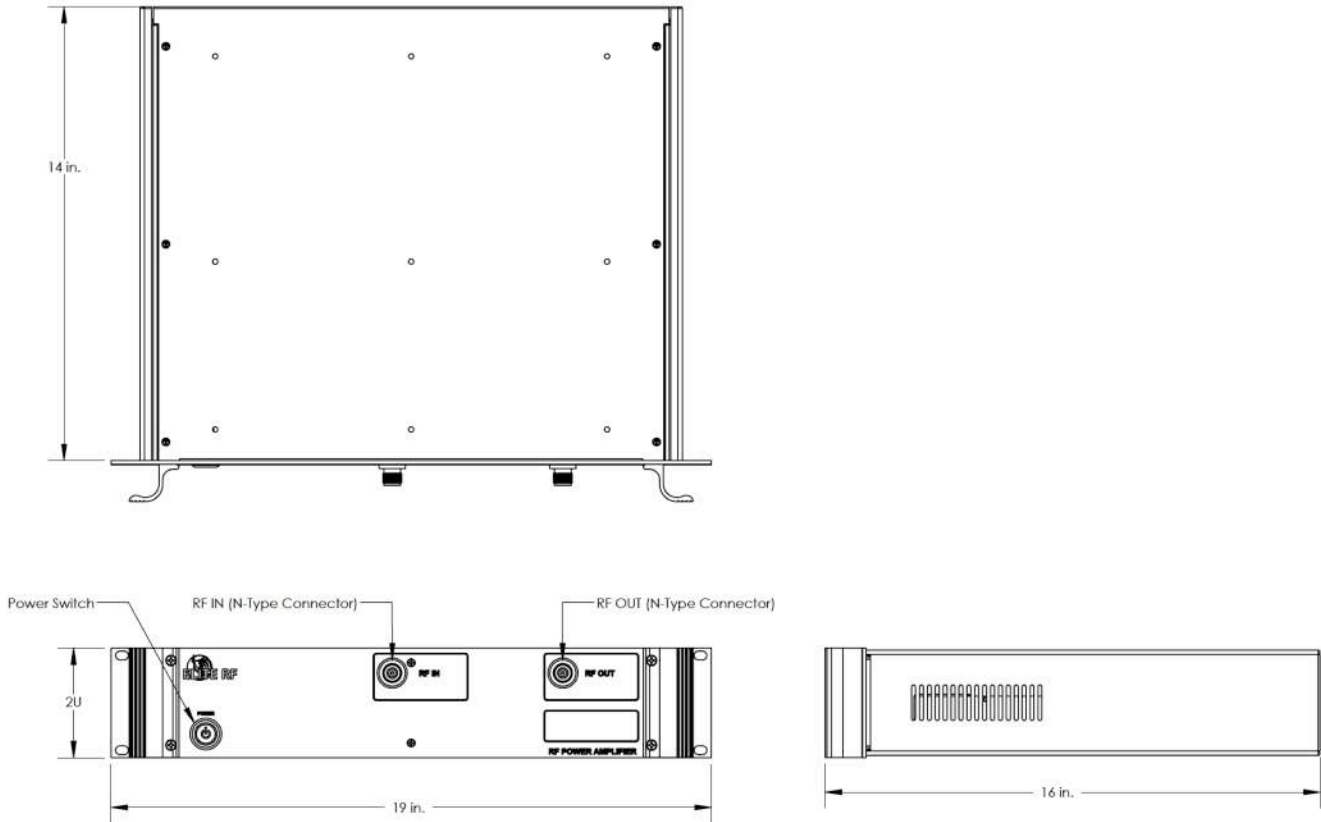

### Output Power vs. Input Power

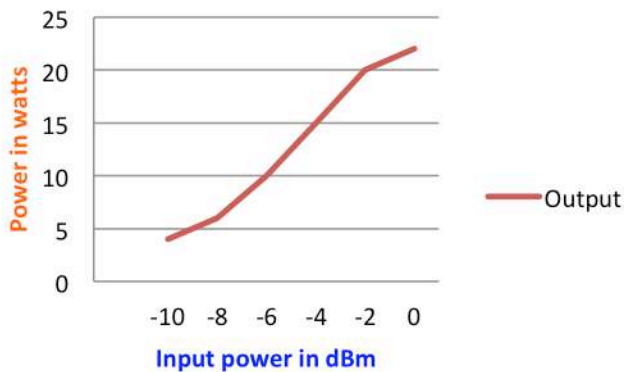

### Gain vs. Frequency

