


**6-18GHz 100W CW Power Amplifier**

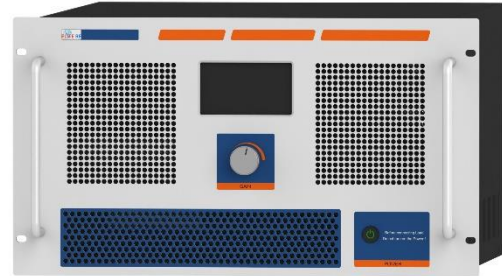

➤ **Features**

- Class A solid state design
- Power level/Output VSWR display
- Protected against over heat/ over voltage/over VSWR

➤ **Applications**

- Communication
- Defense

➤ **Electrical Specifications**

Parameter	Specification	Notes
Frequency	6-18GHz	
Psat	100W Min.	
P1dB	40W Min	
Gain	50dB Min.	
Gain Flatness	±4dB	
Input VSWR	2:1 Max	50 Ω
Harmonics	-15 dBc Typ.	
Spurious	-55 dBc Typ.	
Power Supply	220V	
Power Consumption	2500WMax.	At rated output
Input Power	10dBm Max.	
Power Display Accuracy	±0.5dB	


➤ **Environmental Characteristics**

Parameter	Specification	Notes
Operation Temperature	0 - +40 °C	
Storage Temperature	-40 - +85 °C	
Relative Humidity	5 - 95%	

➤ **Other Specifications**

Parameter	Specification	Notes
Dimensions	6U	
In/Out Connector	N-F/N-F	
Weight	55kg Max	
Cooling	Fan Cooling	
Control interface	LAN	

➤ Home Screen

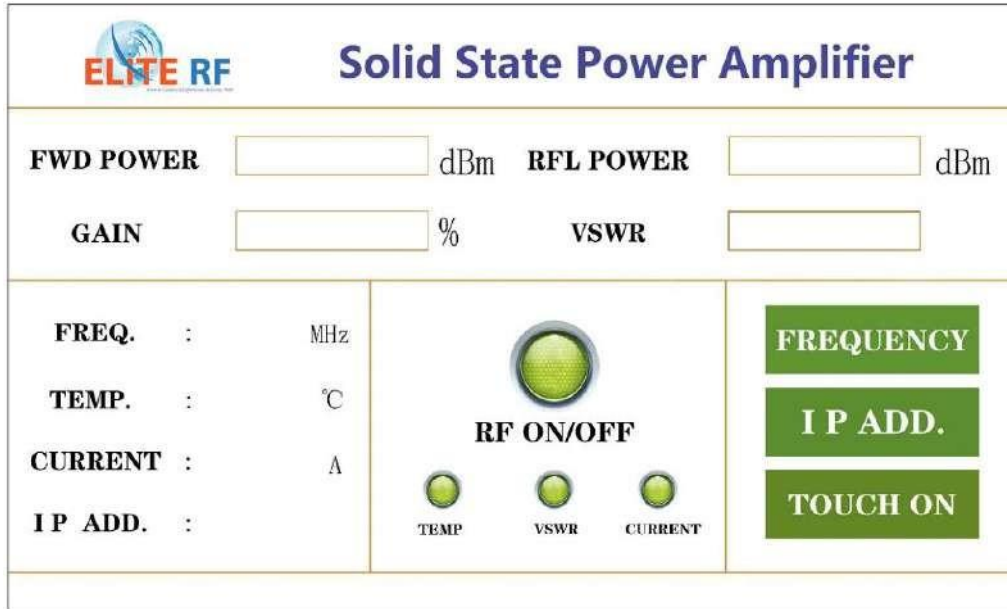

➤ Outline Drawing

Just for Referenc

