

6-18GHz 500W CW Power Amplifier

➤ **Features**

- Class A solid state design
- Power level/Output VSWR display
- Protected against over heat/ over current/over VSWR

➤ **Applications**

- Communication
- EMC

➤ **Electrical Specifications**



Parameter	Specification	Notes
Frequency	6-18GHz	
Psat	500W Min.	
P1dB	200W Typ.	
Gain	57dB Min.	
Gain Flatness	± 4dB	
Input VSWR	2:1 Max	50 Ω
Harmonics	-15dBc Typ.	
Spurious	-60dBc Typ.	
Power Supply	380V	
Power Consumption	7500WMax.	At rated output
Input Power	5dBm Max.	
Power Display Accuracy	± 0.5dB	


➤ **Environmental Characteristics**

Parameter	Specification	Notes
Operation Temperature	0 - +40 °C	
Storage Temperature	-40 - +75 °C	
Relative Humidity	5 - 95%	

➤ **Other Specifications**

Parameter	Specification	Notes
Dimensions	32U	
In/Out Connector	N-F/ WR500	
Weight	260kg Max	
Cooling	Fan Cooling	
Control interface	LAN/USB	

➤ **User Interface**

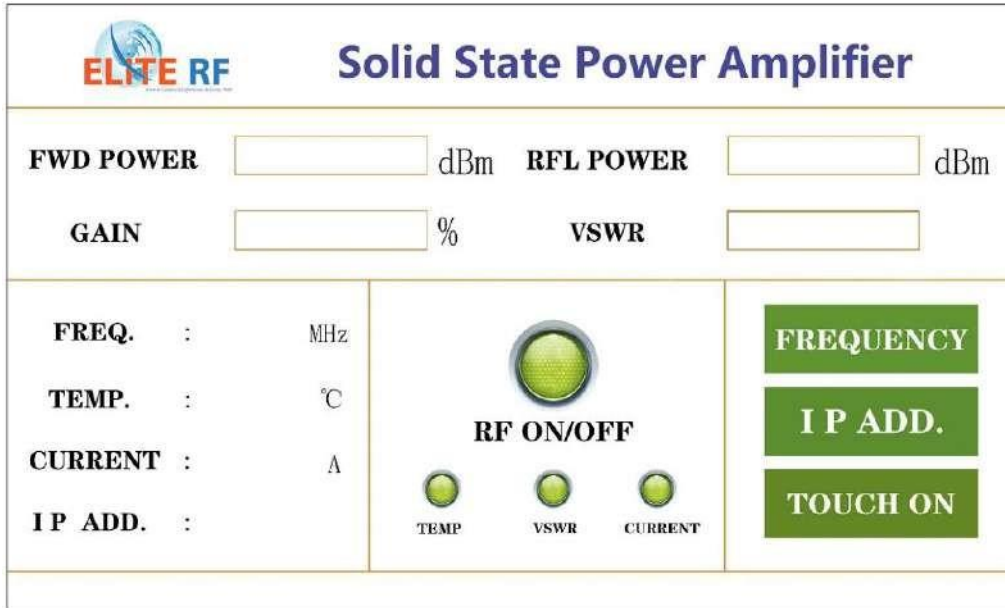

➤ **Outline Drawing**

Just for Reference

