


2-18GHz 25W CW Power Amplifier

➤ **Features**

- Class AB solid state design
- Power level/Output VSWR display
- Protected against over heat/ over current/over VSWR

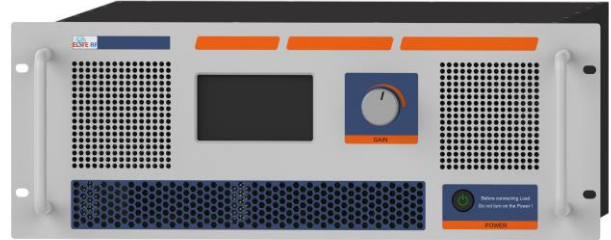

➤ **Applications**

- Communication
- EMC

➤ **Electrical Specifications**

Parameter	Specification	Notes
Frequency	2-18GHz	
Psat	25W Min.	
Gain	44dB Min.	
Gain Flatness	±5dB	
Input VSWR	2:1 Max	50 Ω
Harmonics	-15dBc Typ.	
Spurious	-60dBc Typ.	
Power Supply	100-240V/50-60Hz	
Power Consumption	300WMax.	At rated output
Input Power	5dBm Max.	
Power Display Accuracy	±0.5dB	


➤ **Environmental Characteristics**

Parameter	Specification	Notes
Operation Temperature	0 - +40 °C	
Storage Temperature	-20 - +75 °C	
Relative Humidity	5 - 95%	

➤ **Other Specifications**

Parameter	Specification	Notes
Dimensions	4U	
In/Out Connector	N-F/ N-F	
Weight	40kg Max	
Cooling	Fan Cooling	
Control interface	LAN/USB	

➤ **User Interface**

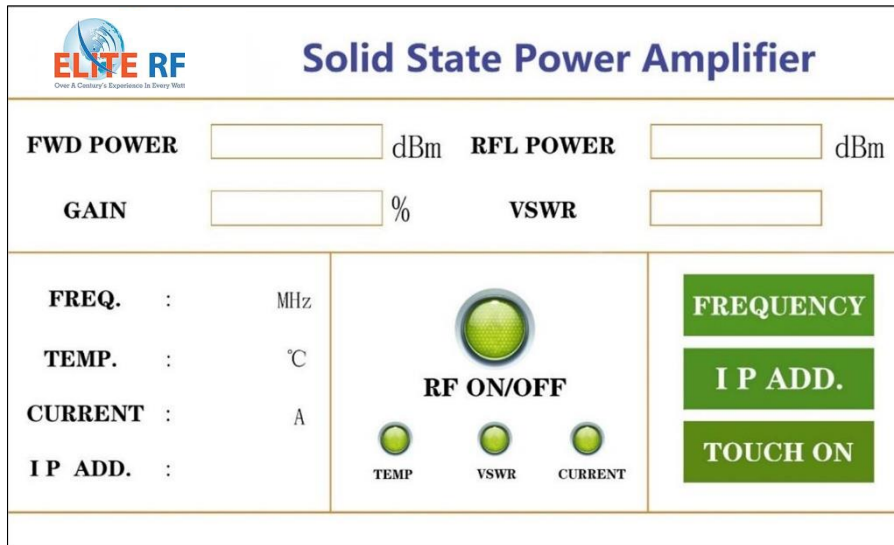

➤ **Outline Drawing**

Just for Reference

